




GSM13 Series PET SMT Splice Tape for Panasonic Machines with Matt Black Color

Our Product Introduction

for more products please visit us on smtmachine-spareparts.com

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GSM1308/GSM1312/GSM1316/GSM1324
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 20*45*10mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days

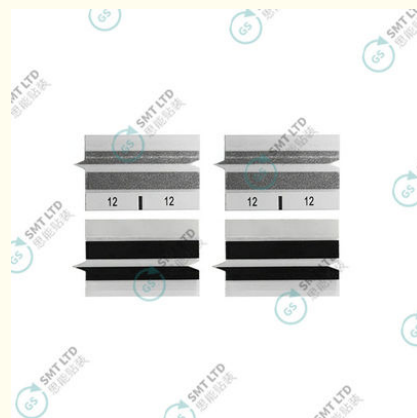

Product Specification

- Brand Name: GS
- Material: PET
- Model Number: GSM1308/GSM1312/GSM1316/GSM1324
- Product Name: SMT Splice Tape
- Application: SMT Process
- Customization: Support
- Highlight: pet smt splice tape, pet smt double splice tape



More Images



Product Description

Special SMT Splice Tape For Panasonic Machine GSM13 Series

GSM13 Series Special SMT Splice Tape For Panasonic Machine

Application Areas

SMT Assembly Lines: Essential in SMT assembly lines, these splice tapes facilitate the seamless joining of carrier tapes, ensuring uninterrupted machine operation and enhanced productivity.

Panasonic Machines: Tailored for Panasonic machines, the matt black color allows sensors to detect the splice accurately, preventing misfeeds and ensuring continuous operation.

Electronics Manufacturing: In the broader electronics manufacturing context, these splice tapes contribute to smoother operations by reducing the need for frequent reel changes and minimizing machine wear and tear.

Detailed Instructions for Use

Cutting the Carrier Tapes: Use the designated cutting tool (GSMTL20/GSMTL30/GSMTL40) to accurately cut the carrier tapes. Precision in cutting ensures a perfect fit and alignment.


Preparing the Splice Tape: Remove the split liner of the splice tape to expose the adhesive side. This step is crucial for ensuring a secure bond between the tapes.

Aligning the Carrier Tapes: Align the cut carrier tapes (cover tape down) with the guide alignment. The placement guide ensures precise alignment, reducing the risk of misalignment.

Joining the Carrier Tapes: Place both ends of the joining carrier tapes onto the first strip of the splice tape. Ensure that they are aligned correctly to avoid any misfeeds.

Securing the Splice: Fold over the second strip of the splice tape to the underside of the carrier tape and press firmly. This ensures a secure and stable splice.

Finalizing the Splice: Remove and discard the clear plastic cover to complete the splice. The tapes are now joined securely and ready for use in the assembly process.

Part (reel)	Dimensions (pc)	Package	
GSM1308 (8mm)	4.5/4.5/4.5mm x 40mm	500pcs	
GSM1312 (12mm)	4.5/6 mm x 40mm	500pcs	
GSM1316 (16mm)	4.5/9 mm x 40mm	500pcs	
GSM1324 (24mm)	4.5/16 mm x 40mm	250pcs	



Special SMT Splice Tape For Panasonic Machine GSM13 Series | GSSMT, SMT double splice tape, SMT double splice tape for pick-and-place, SMT double splice tape yellow, SMT double splice tape suppliers, Double splice tape for SMT machines, SMT double splice tape adhesive, SMT double splice tape black, SMT double splice tape usage guide, SMT double splice tape for feeders, High-quality SMT double splice tape, SMT double splice tape price, SMT splice tape double-sided, Double splice tape for Panasonic SMT, Double splice tape for Fuji SMT, SMT double splice tape compatibility, Double splice tape for high-speed SMT machines, SMT double splice tape performance, SMT double splice tape durability, SMT splice tape double strength, SMT double splice tape best practices



+8613728696610



liyi@gs-smt.com



smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China