



PET SMT Double Splice Tape with Sharp Angle Pre-cut Strips and Embossed Dots for Universal Application

Our Product Introduction

for more products please visit us on smtmachine-spareparts.com


Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GSM0108/GSM0112/GSM0116/GSM0124
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 18*42*10mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification

- Brand Name: GS
- Material: PET
- Model Number: GSM0108/GSM0112/GSM0116/GSM0124
- Product Name: Double Splice Tapes
- Application: SMT Process
- Customization: Support
- Highlight: **PET SMT Double Splice Tape, Sharp SMT Double Splice Tape**

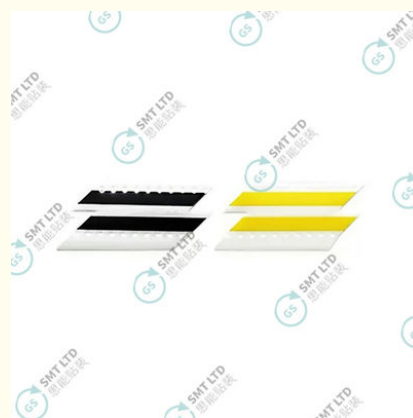

More Images



Product Description

PET Sharp Angle SMT Double Splice Tape Universal GSM01 Series

GSM01 Series SMT PET Sharp Angle Double Splice Tape Universal

GSM01 series Double Splice Tapes are designed for joining SMT component carrier tapes. Supplied in pre-cut PET tape strips, these tapes can be used without requiring a splice tool and clip. Each piece features 10 embossed dots on either side for precise alignment with the carrier tape. Available in three variants: anti-static, half anti-static, and non anti-static.

Instructions for Using GSM01 Series Double Splice Tapes

Use the Cutting Tool to Accurately Cut the Carrier Tapes: Begin with a cutting tool (GSMTL20, GSMTL30, or GSMTL40) to make clean, precise cuts on the carrier tapes.

Remove the Release Liner of the Splice Tape: Expose the adhesive side by removing the release liner from the splice tape.

Align the Cut Carrier Tapes with the Placement Guide: Position the cut carrier tapes (cover tape facing down) with the placement guide on the splice tape.

Place Both Joining Carrier Tapes onto the First Strip of the Splice Tape: Carefully align and place both carrier tapes onto the first strip of splice tape, ensuring proper adhesive contact.

Fold Over the Second Strip to the Underside of the Carrier Tape: Secure the connection by folding the second strip to the underside and pressing firmly for a strong bond.

Remove and Discard the Clear Plastic Cover and Guide: Complete the splice by removing the clear plastic cover, making it ready for SMT production.

Part (reel)	Dimensions (pc)	Package(box)	
GSM0108 (8mm)	4.8mm x 40mm	500pcs	
GSM0112 (12mm)	6mm x 40mm	500pcs	
GSM0116 (16mm)	9.5mm x 40mm	500pcs	
GSM0124 (24mm)	16mm x 40mm	250pcs	

SMT PET Sharp Angle Double Splice Tape Universal GSM01 Series | GSSMT, SMT double splice tape, SMT double splice tape for pick-and-place, SMT double splice tape yellow, SMT double splice tape suppliers, Double splice tape for SMT machines, SMT double splice tape adhesive, SMT double splice tape black, SMT double splice tape usage guide, SMT double splice tape for feeders, High-quality SMT double splice tape, SMT double splice tape price, SMT splice tape double-sided, Double splice tape for Panasonic SMT, Double splice tape for Fuji SMT, SMT double splice tape compatibility, Double splice tape for high-speed SMT machines, SMT double splice tape performance, SMT double splice tape durability, SMT splice tape double strength, SMT double splice tape best practices



Global Soul Limited



+8613728696610



liyi@gs-smt.com



smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China