



Removable Double ESD SMT Splicing Cart SMT Trolley GSK700

Our Product Introduction

for more products please visit us on smtmachine-spareparts.com

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GSK700
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 100~110cm x 55cm x 42cm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification

- Brand Name: GS
- Model Number: SMT Splicing Cart
- Dimensions (pc): 100~110cm X 55cm X 42cm
- Material: Steel Tool Body+Plastic Handle
- Application: SMT Process
- Customization: Support
- Packing: 1Pcs Per Box
- Lead Time: 1-7 Days
- Highlight: esd smt splicing cart, esd smt splicing tool



More Images



Product Description

GSK700 Removable Double ESD SMT Splicing Cart SMT Trolley

The GSK700 SMT Splicing Tool ESD SMT Splice Cart is a state-of-the-art solution for seamless and efficient splicing of SMT carrier tapes. Designed to enhance productivity on SMT production lines, this trolley is equipped with a stapler-style splice tool specifically for SMT carrier tapes, ensuring precise and reliable connections.

Applications:


1. SMT Carrier Tape Splicing: The GSK700 is tailored for the splicing of SMT carrier tapes, providing a seamless integration into various SMT production environments.
2. Mobility and Flexibility: Thanks to its rotatable wheels, this splice cart can be easily moved across different SMT production lines, offering unmatched flexibility and convenience.
3. Compatibility: The GSK700 must be used with the GS splicing tool GSMTL60, ensuring a cohesive and efficient splicing process.
4. Efficiency and Reliability: The tool's easy operation and reliable performance significantly improve production efficiency, reducing downtime and enhancing overall productivity.

Advantages:

1. ESD Protection: The cart features an ESD design that effectively eliminates static damage, protecting sensitive electronic components during the splicing process.
2. 360-Degree Mobility: Equipped with rotatable wheels, the cart can be moved effortlessly in any direction, making it highly maneuverable on the production floor.
3. Adjustable Height: The splicing plate height is adjustable from 900mm to 1030mm, allowing operators to customize the setup for maximum comfort and efficiency.
4. Innovative Design: The specially designed tool base allows the splice plier to rotate freely, and the copper scrap collection box ensures a clean and organized workspace.
5. Lightweight Junk Box: The included junk box is simple, lightweight, and features anti-static properties, further enhancing the tool's practicality and safety.

Instructions:

1. Adjust Height: Begin by adjusting the SMT Splice Cart to a suitable height for comfortable operation.
2. Position Carrier Tape: Place the component carrier tape on the 2mm or 4mm pitch placement pin guides.
3. Install Clips: Secure GSM0700 clips onto the GSMTL60 splicing tool.
4. Center and Secure: Center both carrier tapes (with the cover tape facing up) on the pins and secure them using the clamps.
5. Crimp and Connect: Crimp the handle to connect the carrier tapes and then remove them.
6. Apply Splice Tape: Add a splice tape strip to the cover tape and press firmly to complete the splice.

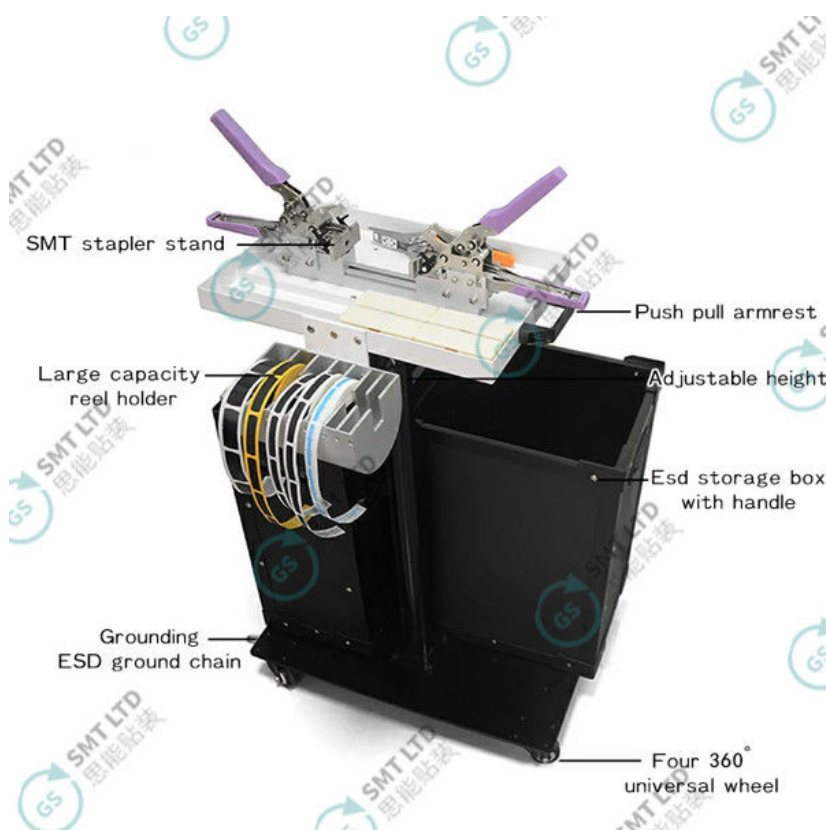

Removable Double ESD SMT Splicing Cart SMT Trolley GSK700 | GSSMT, SMT splice tape, SMT splicing machine, SMT splice connectors, SMT splicing equipment, SMT tape splicing tools, SMT splice tool kit, SMT splicing process, SMT splice tool manufacturers, SMT tape splicing technique, SMT splice repair tools, SMT splicing solutions, Automatic SMT splice tools, Manual SMT splice tools, SMT splice tool application, SMT splice tape application, SMT tape jointing tools, High-speed SMT splicing tools, SMT splice tool comparison, SMT splice tape handling, Best SMT splice tools



Global Soul Limited



+8613728696610



liyi@gs-smt.com



smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China