







## SMT Dimm Cabinet Double Track GS-JBT2109 with Feeding Speed 2.5s/Pcs and Xinjie Operation Screen

## **Basic Information**

Place of Origin: ChinaBrand Name: GS

Model Number: GS-JBT2109Minimum Order Quantity: 1/PCS

Price: USD+negotiable+pcs
Packaging Details: 900\*1500\*1250
Delivery Time: 1-3 days
Payment Terms: T/T

Supply Ability: 1+pcs+per days



## **Product Specification**

Model: GS-JBT2109

• Dimensions (length \* Width Please Refer To The Following Drawings

\* Height Company Mm):

Working Voltage: AC 220V
Air Source Requirements: 0.5Mpa
Maximum Power: 800W
Feeding Speed: 2.5s/Pcs

Operation Panel: Xinjie Operation Screen
 Control: Lei Sai Control Board

• Thoroughfare: 2 Channels

Adapt To The Material Tray: Please Refer To The Following Drawings
 Material: Compatible With PTH And SMT Materials

• Condition: New


Highlight: Double Track SMT Dimm Cabinet,

SMT Dimm Cabinet, GS-JBT2109

SMT Dimm Cabinet [Double Track] (GS-JBT2109)

The DIMM tray feeder is a component supply device that arranges multiple stacked DIMM slots in an orderly manner and supplies them to the insertion machine one by one at a specified time.



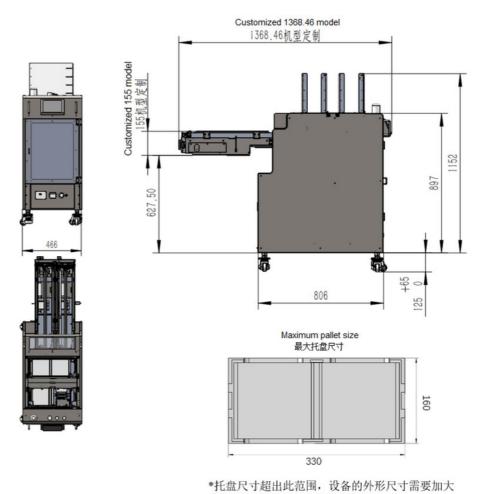

If the size of the pallet exceeds this range, the external dimensions of the equipment need to be enlarged

If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize exclusive feeders.

