







SMT DIMM Cabinet Feeder GS-JBT2109 Double Track 2.5s/Pcs

Basic Information

Place of Origin: ChinaBrand Name: GS

Model Number: GS-JBT2109Minimum Order Quantity: 1/PCS

Price: USD+negotiable+pcs
Packaging Details: 900*1500*1250
Delivery Time: 1-3 days
Payment Terms: T/T

Supply Ability: 1+pcs+per days



Product Specification

Model: GS-JBT2109

• Dimensions (length * Width Please Refer To The Following Drawings

* Height Company Mm):

Working Voltage: AC 220V
Air Source Requirements: 0.5Mpa
Maximum Power: 800W
Feeding Speed: 2.5s/Pcs

Operation Panel: Xinjie Operation Screen
 Control: Lei Sai Control Board

• Thoroughfare: 2 Channels

Adapt To The Material Tray: Please Refer To The Following Drawings
 Material: Compatible With PTH And SMT Materials

• Condition: New

Highlight: Double Track SMT Dimm Cabinet,

SMT Dimm Cabinet, GS-JBT2109

SMT Dimm Cabinet Double Track GS-JBT2109

High-Speed Feeding at 2.5s/Pcs with Xinjie Operation Screen

Product Specifications


Attribute	Value
Model	GS-JBT2109
Dimensions	Please refer to the following drawings
Working voltage	AC 220V
Air source requirements	0.5Mpa
Maximum power	800W
Feeding speed	2.5s/Pcs
Operation panel	Xinjie operation screen
Control	Lei Sai Control Board
Thoroughfare	2 channels
Adapt to the material tray	Please refer to the following drawings
Material	Compatible with PTH and SMT materials
Condition	New

Product Description

The DIMM tray feeder is a precision component supply device designed to arrange multiple stacked DIMM slots in an orderly manner and deliver them to the insertion machine at a consistent speed of 2.5 seconds per piece.





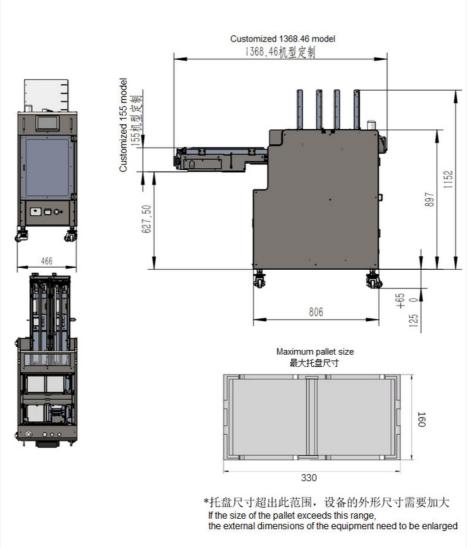

For special material dimensions, please contact our technical team for consultation. We can provide customized solutions and exclusive feeders tailored to your specific requirements.





+8613728696610



liyi@gs-smt.com



e smtmachine-spareparts.com