




GS-RDD2112 High Precision Radial Feeder with $\pm 0.2\text{mm}$ Tolerance

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RDD2112
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 900*90*300mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days

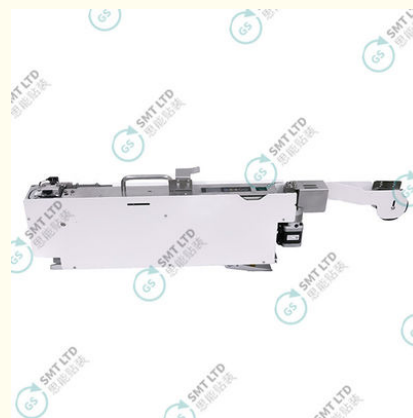

Product Specification

- Model: GS-RDD2112
- External Dimensions (length*width*height): 790*75*205(180)mm
The Height From The Bottom To The Feeding Port: 180mm
Height At The Highest Point (from The Bottom To The Handle) : 205mm
- Weight: 11KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80*160 Pixels
- Error In The Length Of The Material Cutting Feet: $\pm 0.2\text{mm}$
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm
- Function Of Cutting Waste Tape: Have



Product Description

High Precision Radial Feeder GS-RDD2112 with $\pm 0.2\text{mm}$ Material Cutting Feet Error Tolerance


Product Specifications

Attribute	Value
Model	GS-RDD2112
External dimensions (L×W×H)	790×75×205(180)mm (Height from bottom to feeding port: 180mm Height at highest point: 205mm)
Weight	11KG
Working voltage	DC 24V
Gas source requirements	None
Feeding speed	0.6-2s/Pcs
Drive mode	Pure electric
Operation panel	0.96-inch TFT color screen (80×160 pixels)
Error in length of material cutting feet	$\pm 0.2\text{mm}$
Applicable tape hole spacing	12.7mm/15mm
Waste tape cutting function	Yes
Bending function	Optional (customizable based on material)
Cutter lifespan	≥ 1 million cycles
Condition	New

Product Description

Hook Type: Radial Feeder (GS-RDD2112)

The radial feeder is an electronic component supply device that maintains consistent intervals, delivers components from radial tape packaging one by one at specified times, cuts lead wires, and supplies them to the insertion machine.

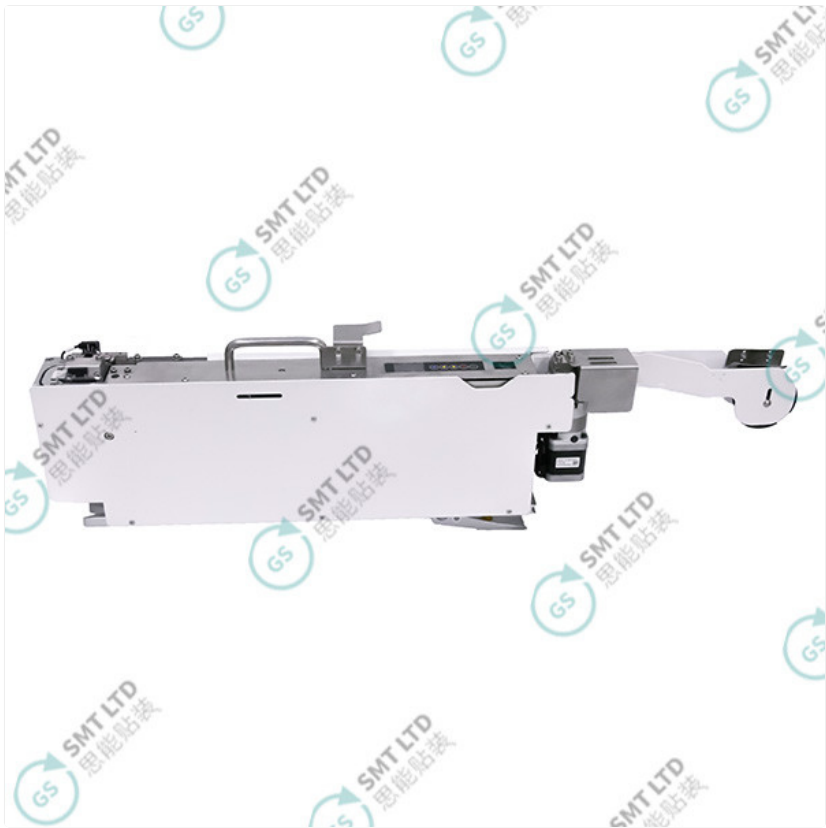

Applicable taping styles

(The following are some display pictures)



LED

Resistance

Ferrari supercapacitor

Ceramic capacitor


Finished product

(The following partial display pictures)



Note: Compatible with two types of materials

Compatible with braided tape materials specifications:

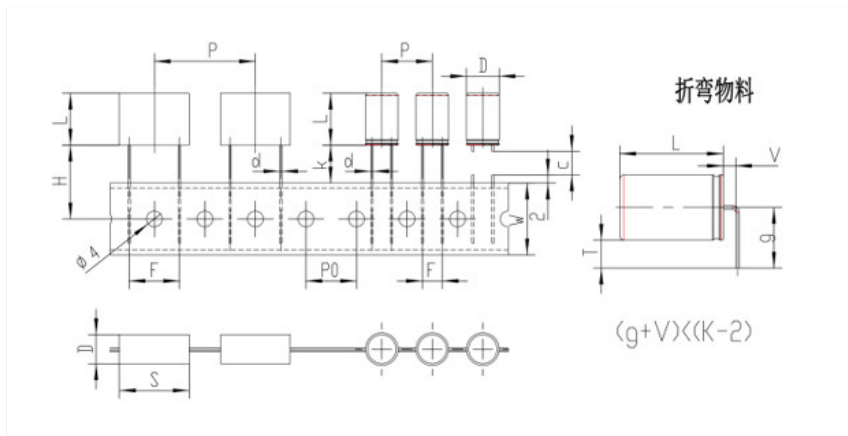

Feeder type		GS-RDD2105 (L)	Remarks
code	explain	Feeder reference material dimensions(mm)	
D	Material width	≤14	
S	Material length	≤14	
L	Material height	≤30	
F	Pin spacing	Standard knife: ≤10	Default standard knife
		Wide knife: 8-13	Optional
		Big knife: 8-23	Optional
d	Pin diameter	The largest1.0	
PO	Hole spacing	12.7or15	Default12.7
C	Adjustable range of the cutting knife	0-6(Based onW*2)	
V	The distance from the main body to the bending point	≥1.5	
K	The distance from braided to the bottom of the main body		
W	Braided tape height	18	
2	The minimum position dimension of the foot cutter	2	The minimum residual exposed size after the pins are cut

For special material dimensions, please contact our company for consultation. We can provide solutions and customize exclusive feeders to meet your specific requirements.

