



GS-RDD2105L Radial Feeder for SMT Components ≤14mm Width

Our Product Introduction

for more products please visit us on smtmachine-spareparts.com

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RDD2105(L)
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 850*85*170mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification

- Feeder Type: GS-RDD2105 L
- Explain: Feeder Reference Material Dimensions(mm)
- Material Width: ≤14
- Material Length: ≤14
- Material Height: ≤30
- Pin Spacing 1: Standard Knife ≤10(Default Standard Knife)
- Pin Spacing 2: Wide Knife 8-13(Optional)
- Pin Spacing 3: Big Knife 8-23(Optional)
- Pin Diameter: The Largest1.0
- Hole Spacing: 12.7or15(Default12.7)
- Adjustable Range Of The Cutting Knife: 0-6(Based OnW+2)
- The Distance From The Main Body To The Bending Point: ≥1.5
- Braided Tape Height: 18



More Images



Product Description

GS-RDD2105 L Radial Feeder

Material width $\leq 14\text{mm}$ | Material length $\leq 14\text{mm}$

Product Specifications

Attribute	Value
Feeder type	GS-RDD2105 L
Material width	$\leq 14\text{mm}$
Material length	$\leq 14\text{mm}$
Material height	$\leq 30\text{mm}$
Pin spacing 1 (Standard knife)	$\leq 10\text{mm}$ (Default standard knife)
Pin spacing 2 (Wide knife)	8-13mm (Optional)
Pin spacing 3 (Big knife)	8-23mm (Optional)
Pin diameter	The largest 1.0mm
Hole spacing	12.7 or 15mm (Default 12.7mm)
Adjustable range of the cutting knife	0-6mm (Based on W+2)
The distance from the main body to the bending point	$\geq 1.5\text{mm}$
Braided tape height	18mm
The minimum position dimension of the foot cutter	2mm (The minimum residual exposed size after the pins are cut)

Vertical Feeder GS-RDD2105(L)

The Vertical feeder is an electronic component supply device that maintains precise intervals, delivering vertically packaged electronic components one by one at specified times. It cuts lead wires and supplies components to the insertion machine with high accuracy.








Bend Display



Applicable material styles

(The following are some display pictures)

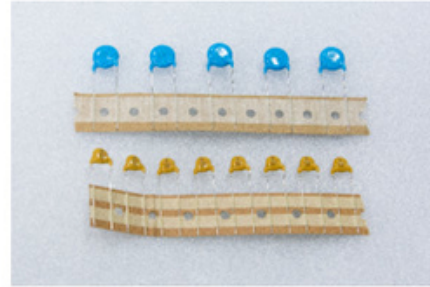

Finished product

(The following partial display pictures)




Note :GS-RDD2105 is the standard model (feeding and cutting) Radial Feeder, GS-RDD2105(L)

Specifications and Parameters

Model	GS-RAD2201	Remarks
External dimensions (length * width * height)	750*68*144(110)mm	Width: Depending on the incoming materials provided, the width will increase (the external width will increase the height of the material by one). Gao: Height from the bottom to the handle (the highest point) :144mm The height from the bottom to the feeding port :110mm
Weight	8KG	
Working voltage	DC 24V	
Gas source requirements	no	
Maximum current	3A	
Feeding speed	0.6-2s/Pcs	
Drive mode	Pure electric	
Operation panel	0.96-inch TFT color screen 80*160 pixels	
Error in the length of the material cutting feet	±0.2mm	
Applicable to the hole spacing of the tape	12.7mm/15mm	Parts need to be replaced.
Function of cutting waste tape	have	
Bending function	Optional separately	The bending function can be customized according to the material
The number of times the cutter is used	≥100万	
Tape braiding requirements	K: Distance from the brinell to the bottom of the main body \ nV: Distance from the main body to the bending point \ nG: The bending height required by the product satisfies the formula : $(g+VK-2)$	

Braided Material Compatibility

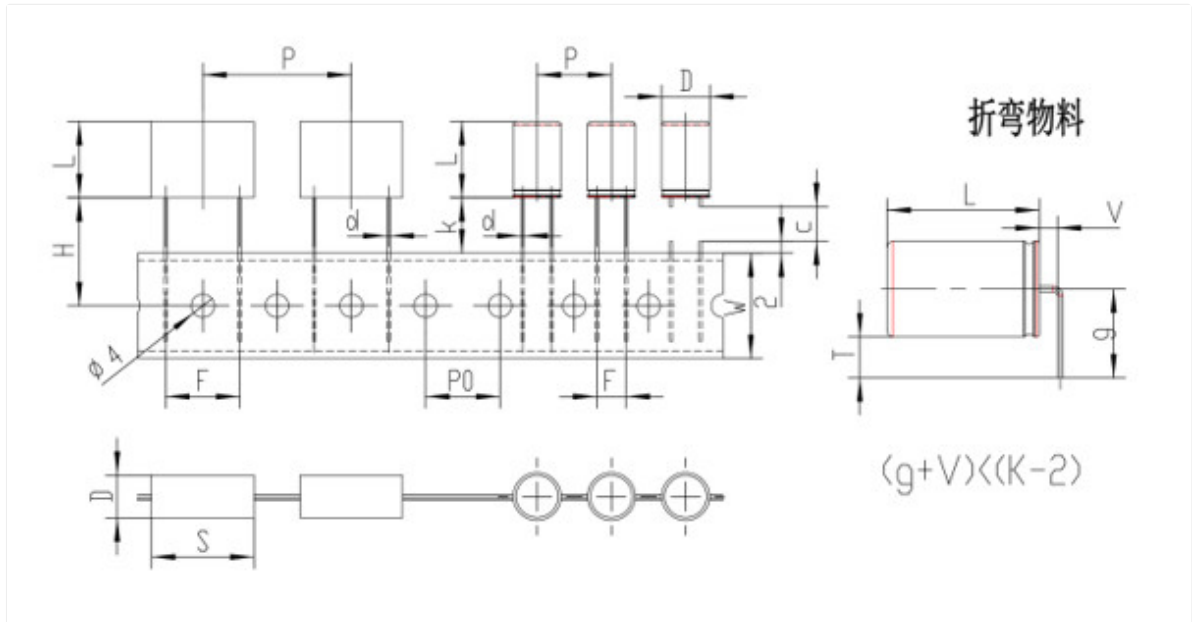

For special material dimensions, please contact our company for consultation. We can provide customized solutions and exclusive feeder configurations to meet your specific requirements.