



## 48mm Radial Feeder GS-RAD2203 with Cutter DC 24V for 12.7mm/15mm Tape

### Our Product Introduction

#### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RAD2203
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 950\*60\*180mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



#### Product Specification

- Model: GS-RAD2203
- External Dimensions (length740\*47\*144(110)mm(The Height From The Bottom To The Feeding Port: 110cm Height At The Highest Point (from The Bottom To The Handle) : 144mm)
- Weight: 6KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80\*160 Pixels
- Error In The Length Of The Material Cutting Feet:  $\pm 0.2$ mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm(Parts Need To Be Replaced)
- Function Of Cutting Waste: Optional/DK RAD2203: With A Cutter DK



## Product Description

### 48mm Radial Feeder GS-RAD2203 with cutter Working Voltage DC 24V For 12.7mm/15mm Tape Hole Spacing

#### Product Specifications



Attribute	Value
Model	GS-RAD2203
External dimensions (L×W×H)	740×47×144(110)mm (Height from bottom to feeding port: 110mm Height at highest point: 144mm)
Weight	6KG
Working voltage	DC 24V
Gas source requirements	None
Maximum current	3A
Feeding speed	0.6-2s/Pcs
Drive mode	Pure electric
Operation panel	0.96-inch TFT color screen 80×160 pixels
Error in material cutting length	±0.2mm
Applicable tape hole spacing	12.7mm/15mm (Parts need to be replaced)
Cutting waste tape function	Optional (DK-RAD2203: With cutter, DK-RAD2101: No cutter)
Bending function	Optional (Can be customized according to material)
Cutter lifespan	≥1 million uses

#### Product Description

##### 48mm Radial Feeder (GS-RAD2203) with Cutter

The GS-RAD2203 Radial Feeder is an advanced electronic component supply device designed for Radial tape packaging. It precisely maintains component intervals and delivers electronic components one by one at specified times, while cutting lead wires for seamless supply to insertion machines.



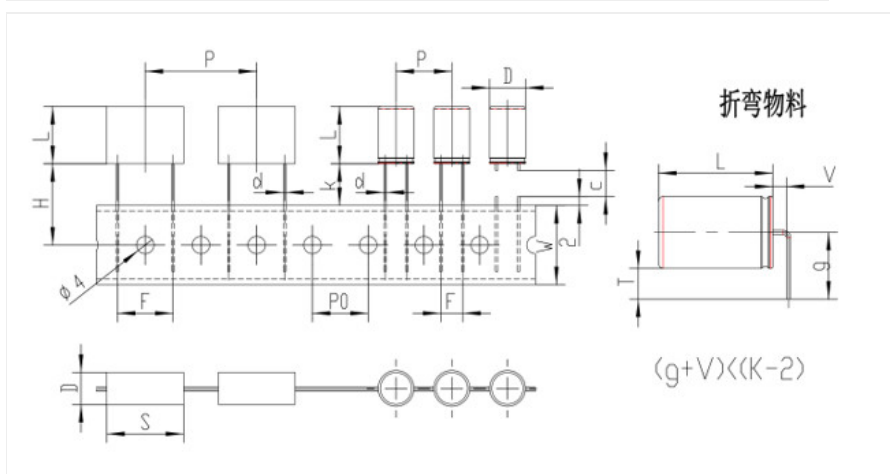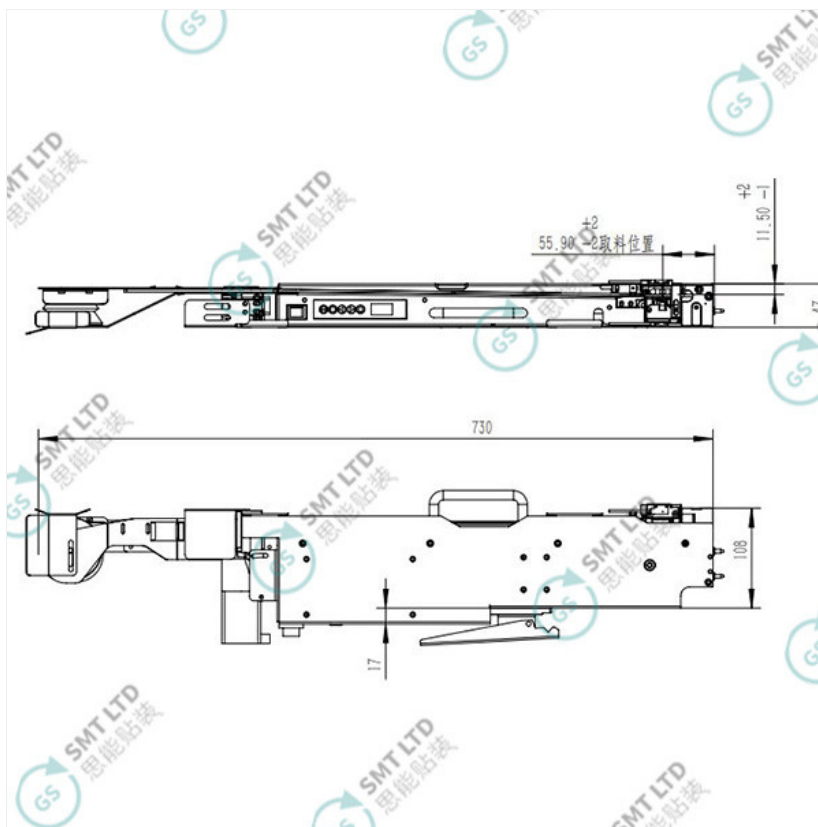

		Feeder type		Remarks
		GS-RAD2203	GS-RAD2201	
code	explain	Feeder reference material dimensions(mm)		
D	Material width	≤11	≤14	
S	Material length	≤14	≤14	
L	Material height	≤30	≤30	
F	Pin spacing	Narrow knife: ≤10	Narrow knife: ≤10	Default narrow knife
		Wide knife: 8-13	Wide knife: 8-13	Optional
		Big knife: 8-16	Big knife: 8-23	Optional
d	Pin diameter	The largest 0.6	The largest 1.0	
P0	Hole spacing	12.7 or 15		Default 12.7
C	Adjustable range of the cutting knife	0-6 (Based on W+2)		
V	The distance from the main body to the bending point	≥1.5		
K	The distance from braided to the bottom of the main body			
W	Braided tape height	18		
2	foot cutter	2	The minimum residual exposed size after the pins are cut	

For special material dimensions or custom requirements, please contact our company for consultation. We can provide tailored solutions and customize feeders to meet your specific needs.



**Global Soul Limited**



+8613728696610



liyi@gs-smt.com



smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China