



48mm Radial Feeder GS-RAD2203 with cutter Working Voltage DC 24V For 12.7mm/15mm Tape Hole Spacing

Our Product Introduction

for more products please visit us on smtmachine-spareparts.com

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RAD2203
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 950*60*180mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification


- Model: GS-RAD2203
- External Dimensions (length740*47*144(110)mm(The Height From The Bottom To The Feeding Port: 110cm Height At The Highest Point (from The Bottom To The Handle) : 144mm)
- Weight: 6KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80*160 Pixels
- Error In The Length Of The Material Cutting Feet: ± 0.2 mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm(Parts Need To Be Replaced)
- Function Of Cutting Waste: Optional/DK RAD2203: With A Cutter DK





Product Description

48mm Radial Feeder(GS-RAD2203)-[with cutter]

The Radial feeder is an electronic component supply device that maintains a certain interval and sends out the electronic components of the Radial tape packaging one by one at a specified time, cuts the lead wires, and supplies them to the insertion machine.

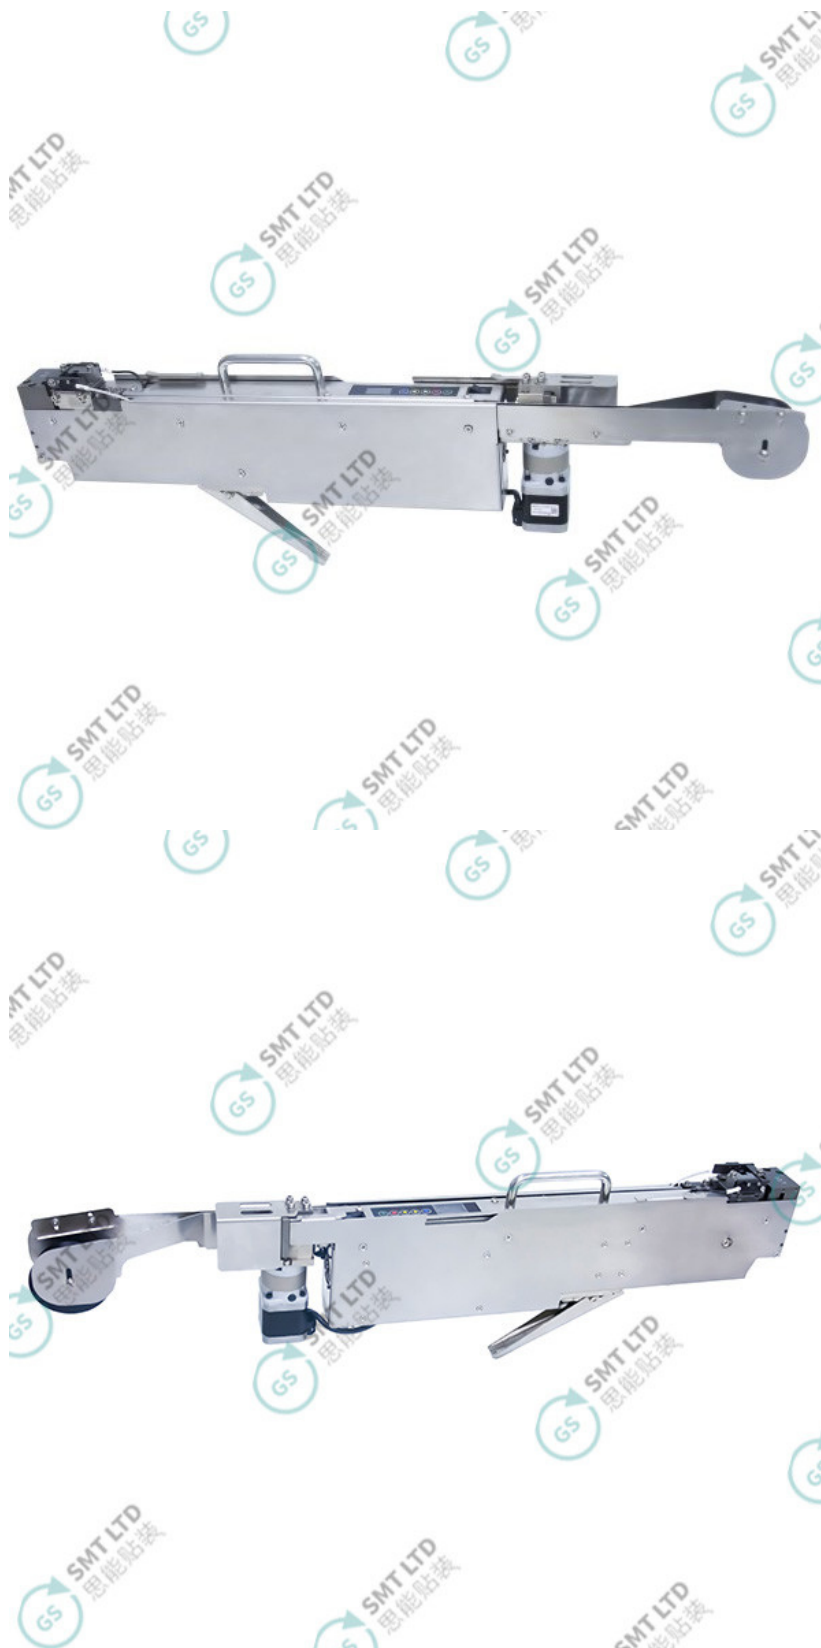

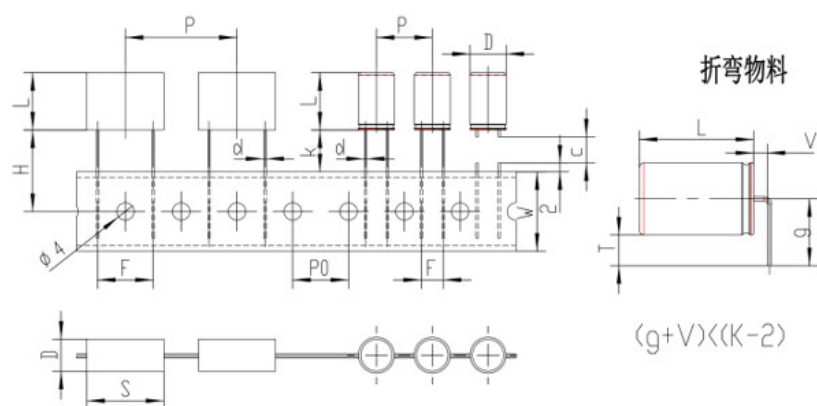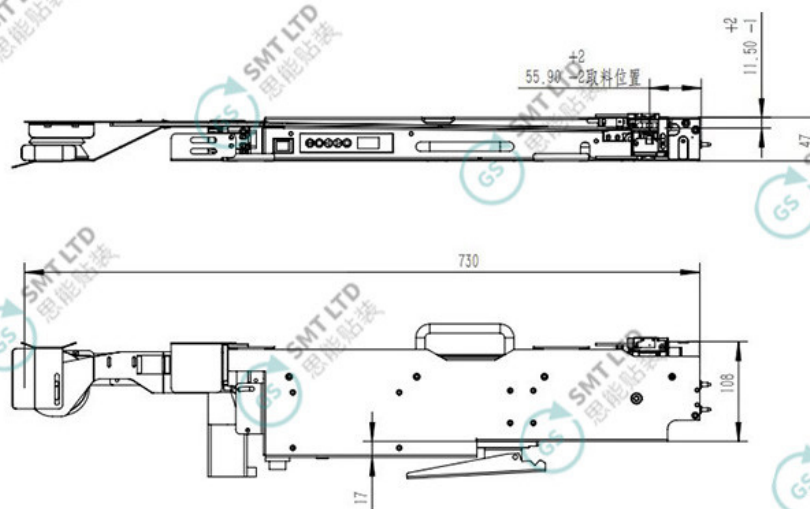

		Feeder type			Remarks
		GS-RAD2203	GS-RAD2201		
code	explain	Feeder reference material dimensions(mm)			
D	Material width	≤11	≤14≤14		
S	Material length	≤14			
L	Material height	≤30	≤30		
F	Pin spacing	Narrow knife: ≤10	Narrow knife: ≤10	Narrow knife: ≤10	Default narrow knife
		Wide knife: 8-13	Wide knife: 8-13	Wide knife: 8-13	Optional
		Big knife: 8-16	Big knife: 8-23		Optional
d	Pin diameter	The largest0.6	The largest1.0		
P0	Hole spacing	12.7or15			Default12.7
C	Adjustable range of the cutting knife	0-6(Based onW+2)			
V	The distance from the main body to the bending point	≥1.5			
K	The distance from braided to the bottom of the main body				
W	Braided tape height	18			
2	foot cutter	2	The minimum residual exposed size after the pins are cut		

If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize feeders.



Global Soul Limited



+8613728696610



liyi@gs-smt.com



smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China