



## 48mm Vertical Feeder GS-RAD2101 3A Max Current for 12.7mm/15mm Tape

### Our Product Introduction

#### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RAD2101
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 900\*60\*180mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



#### Product Specification

- Model: GS-RAD2101
- External Dimensions (length740\*47\*144(110)mm(The Height From The Bottom To The Feeding Port: 110cm Height At The Highest Point (from The Bottom To The Handle) : 144mm)
- Weight: 6KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80\*160 Pixels
- Error In The Length Of The Material Cutting Feet:  $\pm 0.2$ mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm(Parts Need To Be Replaced)
- Function Of Cutting Waste: Optional(GS-RAD2202: With A Cutter GS)



Product Description

48mm Vertical Feeder GS-RAD2101

3A Maximum Current | Applicable to 12.7mm/15mm Tape Hole Spacing | Without Cutter


Product Specifications

Attribute	Value
Model	GS-RAD2101
External dimensions (L×W×H)	740×47×144(110)mm (Height from bottom to feeding port: 110mm Height at highest point: 144mm)
Weight	6KG
Working voltage	DC 24V
Gas source requirements	None required
Maximum current	3A
Feeding speed	0.6-2s/Pcs
Drive mode	Pure electric
Operation panel	0.96-inch TFT color screen (80×160 pixels)
Error in material cutting length	±0.2mm
Applicable tape hole spacing	12.7mm/15mm (Parts replacement required)
Waste tape cutting function	Optional (GS-RAD2203: With cutter   GS-RAD2101: No cutter)
Bending function	Optional (Customizable according to material requirements)
Cutter lifespan	≥1 million uses

Product Description

48mm Radial Feeder (GS-RAD2101) [Without Cutter]

This vertical feeder is designed for small electronic components, maintaining precise intervals to deliver components from radial tape packaging to insertion machines. The pure electric drive system ensures reliable operation with a maximum current of 3A.

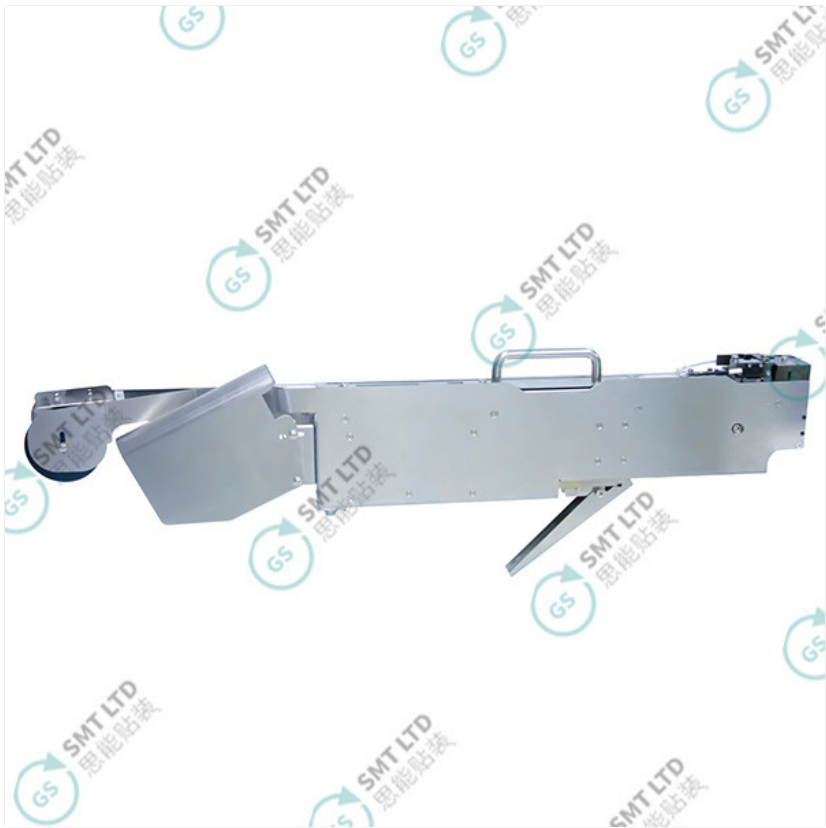


### Applicable material style:

(The following are some of the display pictures)



### After plastic surgery:

(The following part shows the pictures)

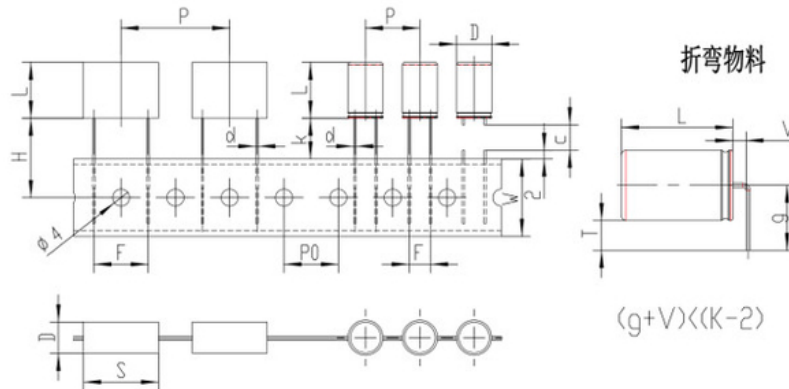

Feeder type					Remarks
		GS-RAD21011	GS-RAD2107		
code	explain	Feeder reference material dimensions(mm)			
D	Material width	$\leq 11$	$\leq 14$		
S	Material length	$\leq 14$	$\leq 14$		
L	Material height	$\leq 30$	$\leq 30$		
F	Pin spacing	Narrow knife: $\leq 10$	Narrow knife: $\leq 10$	Narrow knife: $\leq 10$	Default narrow knife
		Wide knife: 8-13	Wide knife: 8-13	Wide knife: 8-13	Optional
		Big knife: 8-16	Big knife: 8-23		Optional
d	Pin diameter	The largest 0.6	The largest 1.0		
P0	Hole spacing	12.7 or 15			Default 12.7
C	Adjustable range of the cutting knife	0-6 (Based on $W+2$ )			
V	The distance from the main body to the bending point	$\geq 1.5$			
K	The distance from braided to the bottom of the main body				
W	Braided tape height	18			
2	foot cutter	2		The minimum residual exposed size after the pins are cut	

**Custom solutions available:** For special material dimensions, contact our technical team for consultation and customized feeder solutions.



+8613728696610



liyi@gs-smt.com



smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China