



48mm Radial Feeder GS-RAD2410 for 12.7mm 15mm Tape Hole Spacing

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RAD2410
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 900*80*160mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification

- Model: GS-RAD2410
- External Dimensions (length 738*47*135(115)mm(The Height From The Bottom To The Feeding Port: 115mm Height At The Highest Point (from The Bottom To The Handle) : 135mm)
- Weight: 5.5KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80*160 Pixels
- Error In The Length Of The Material Cutting Feet: ± 0.2 mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm
- Function Of Cutting Waste: Optional



for more products please visit us on smtmachine-spareparts.com

Product Description

48mm Radial Feeder GS-RAD2410 With Cutter for 12.7mm/15mm Tape Hole Spacing Gas Source Not Required



Product Specifications


Attribute	Value
Model	GS-RAD2410
External dimensions (L×W×H)	738×47×135(115)mm (Height from bottom to feeding port: 115mm Height at highest point: 135mm)
Weight	5.5KG
Working voltage	DC 24V
Gas source requirements	Not required
Maximum current	3A
Feeding speed	0.6-2s/Pcs
Drive mode	Pure electric
Operation panel	0.96-inch TFT color screen (80×160 pixels)
Error in material cutting length	±0.2mm
Applicable tape hole spacing	12.7mm/15mm
Cutting waste tape function	Optional
Bending function	Optional (customizable according to material)
Cutter lifespan	≥1 million uses

Product Description

- 48mm New Radial Feeder (GS-RAD2410) with cutter for precise component supply
- Electronic component supply device for radial tape packaging
- Maintains consistent interval and timing for component delivery
- Automatically cuts lead wires for insertion machine compatibility



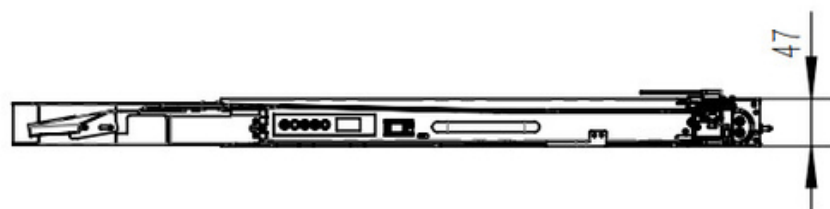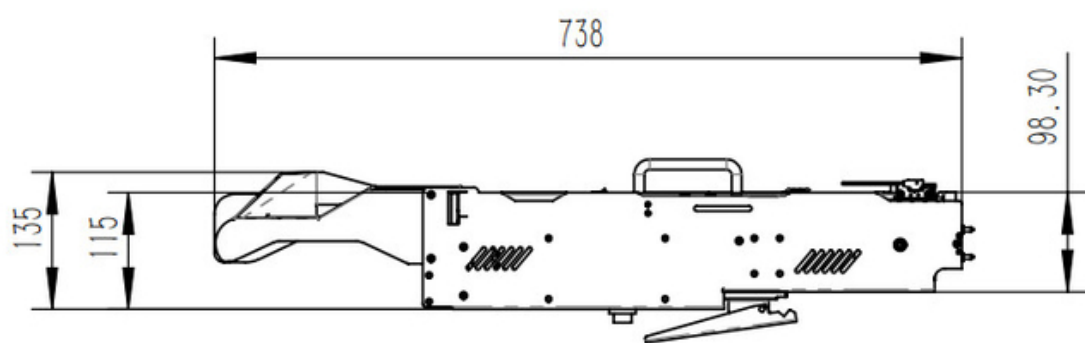

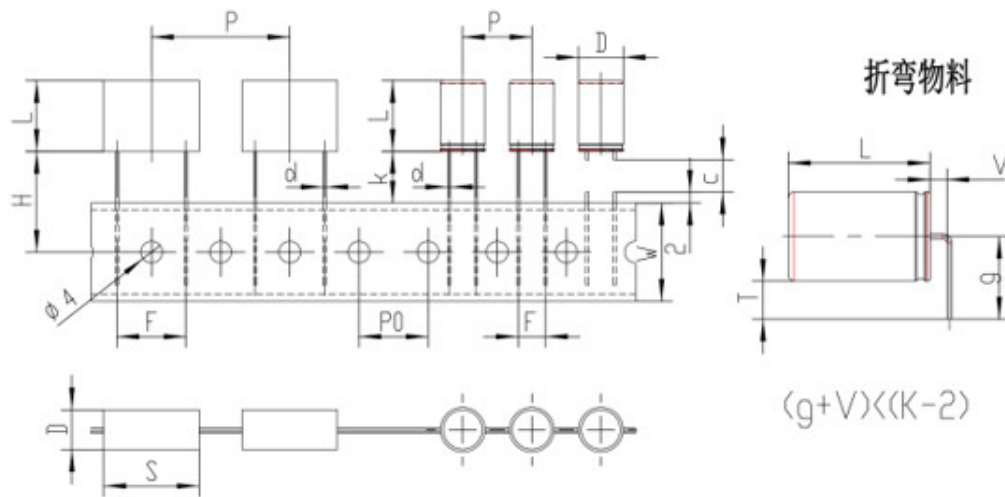

Feeder type		
GS-RAD2410		Remarks
code	explain	Feeder reference material dimensions(mm)
D	Material width	≤11
S	Material length	≤14
L	Material height	≤30
F	Pin spacing	Narrow knife: ≤10
		Wide knife: 8-13
		Big knife: 8-16
d	Pin diameter	The largest 0.6
P0	Hole spacing	12.7 or 15
C	Adjustable range of the cutting knife	0-6 (Based on W+2)
V	The distance from the main body to the bending point	≥1.5
K	The distance from braided to the bottom of the main body	
W	Braided tape height	18
2	The minimum position dimension of the foot cutter	2

For special material dimensions or custom requirements, please contact our company for consultation. We can provide tailored solutions and customize feeders to meet your specific needs.