



70mm Radial Feeder GS-RAD2107 Without Cutter for SMT

Our Product Introduction

for more products please visit us on smtmachine-spareparts.com

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RAD2107
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 900*80*180mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification

- Model: GS-RAD2107
- External Dimensions (length750*68*144(110)mm(The Height From The Bottom To The Feeding Port: 110cm Height At The Highest Point (from The Bottom To The Handle) : 144mm)
 - * Width * Height :
- Weight: 8KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80*160 Pixels
- Error In The Length Of The Material Cutting Feet: ± 0.2 mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm(Parts Need To Be Replaced)
- Function Of Cutting Waste: Optional/GS RAD2201: With A Cutter GS



More Images



Product Description

70mm Radial Feeder GS-RAD2107 Without Cutter Optional Bending Function

Product Specifications

Attribute	Value
Model	GS-RAD2107
External dimensions (L×W×H)	750×68×144(110)mm (Height from bottom to feeding port: 110mm Height at highest point: 144mm)
Weight	8KG
Working voltage	DC 24V
Gas source requirements	None
Maximum current	3A
Feeding speed	0.6-2s/Pcs
Drive mode	Pure electric
Operation panel	0.96-inch TFT color screen (80×160 pixels)
Error in length of material cutting feet	±0.2mm
Applicable hole spacing of tape	12.7mm/15mm (Parts need to be replaced)
Function of cutting waste tape	Optional (GS-RAD2201: With cutter, GS-RAD2107: No cutter)
Bending function	Optional (Can be customized according to material)
Number of times cutter can be used	≥1 million

Product Description

70mm Radial Feeder (GS-RAD2107) [Without Cutter]

The radial feeder is an electronic component supply device that maintains consistent intervals and delivers radial tape-packaged electronic components one by one at specified times. It cuts lead wires and supplies components to insertion machines with precision.





Applicable material style:

(The following are some of the display pictures)



LED

Resistance

Ferrari supercapacitor


Ceramic capacitor

After plastic surgery:

(The following part shows the pictures)



Note: The 48mm vertical feeder is suitable for taping styles, and the 70mm vertical feeder is equally applicable. The difference compared with the former is that it has a wider compatibility range. It can produce materials with larger bodies and thicker pins.

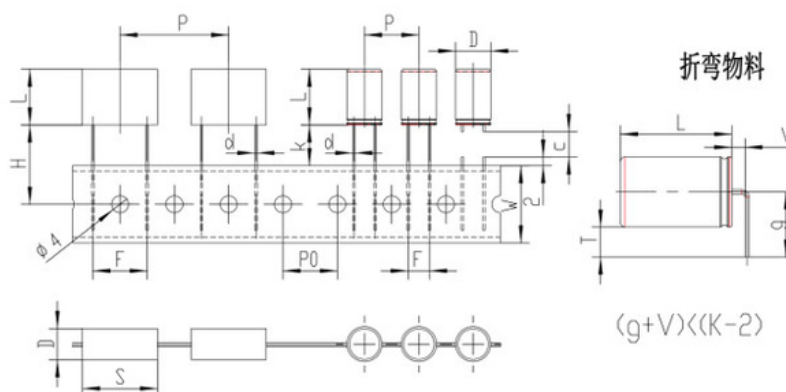

Feeder type				
		GS-RAD2101	GS-RAD2107	Remarks
code	explain	Feeder reference material dimensions(mm)		
D	Material width	≤11	≤14	
S	Material length	≤14	≤14	
L	Material height	≤30	≤30	
F	Pin spacing	Narrow knife: ≤10	Narrow knife: ≤10	Default narrow knife
		Wide knife: 8-13	Wide knife: 8-13	Optional
		Big knife: 8-16	Big knife: 8-23	Optional
d	Pin diameter	The largest0.6	The largest1.0	
P0	Hole spacing	12.7or15		Default12.7
C	Adjustable range of the cutting knife	0-6(Based onW+2)		
V	The distance from the main body to the bending point	≥1.5		
K	The distance from braided to the bottom of the main body			
W	Braided tape height	18		
Z	foot cutter	2	The minimum residual exposed size after the pins are cut	

For special material dimensions, please contact our company for consultation. We can provide customized solutions and exclusive feeders tailored to your specific requirements.



Global Soul Limited



+8613728696610



liyi@gs-smt.com



smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China