



70mm Vertical Feeder GS-RAD2201 with Cutter for 12.7mm/15mm Tape

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RAD2201
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 900*95*175mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification

- Model: GS-RAD2201
- External Dimensions (length750*68*144(110)mm[The Height From The Bottom To The Feeding Port: 110cm Height At The Highest Point (from The Bottom To The Handle) : 144mm]
 - * Width * Height :
- Weight: 8KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80*160 Pixels
- Error In The Length Of The Material Cutting Feet: ± 0.2 mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm(Parts Need To Be Replaced)
- Function Of Cutting Waste: Optional GS-RAD2201: With A Cutter GS



for more products please visit us on smtmachine-spareparts.com

Product Description

70mm Vertical Feeder GS-RAD2201 With Cutter

750×68×144mm External Dimensions | Suitable for 12.7mm/15mm Tape Hole Spacing

Product Specifications

Attribute	Value
Model	GS-RAD2201
External dimensions (L×W×H)	750×68×144mm (110mm height from bottom to feeding port)
Weight	8KG
Working voltage	DC 24V
Gas source requirements	Not required
Maximum current	3A
Feeding speed	0.6-2s/Pcs
Drive mode	Pure electric
Operation panel	0.96-inch TFT color screen (80×160 pixels)
Error in material cutting length	±0.2mm
Applicable tape hole spacing	12.7mm/15mm (parts replacement required)
Waste tape cutting function	Optional (GS-RAD2201 includes cutter)
Bending function	Optional (customizable based on material)
Cutter lifespan	≥1 million uses

Product Description

70mm Vertical Feeder (GS-RAD2201) for Large Materials

The GS-RAD2201 vertical feeder is an advanced electronic component supply device designed for vertical tape packaging. It precisely delivers components at specified intervals, cuts lead wires, and supplies them to insertion machines with high accuracy.



Applicable material style:

(The following are some of the display pictures)



LED



Resistance



Ferrari supercapacitor




Ceramic capacitor

After plastic surgery:

(The following part shows the pictures)



Note: The 48mm vertical feeder is suitable for taping styles, and the 70mm vertical feeder is equally applicable. The difference compared with the former is that it has a wider compatibility range. It can produce materials with larger bodies and thicker pins.

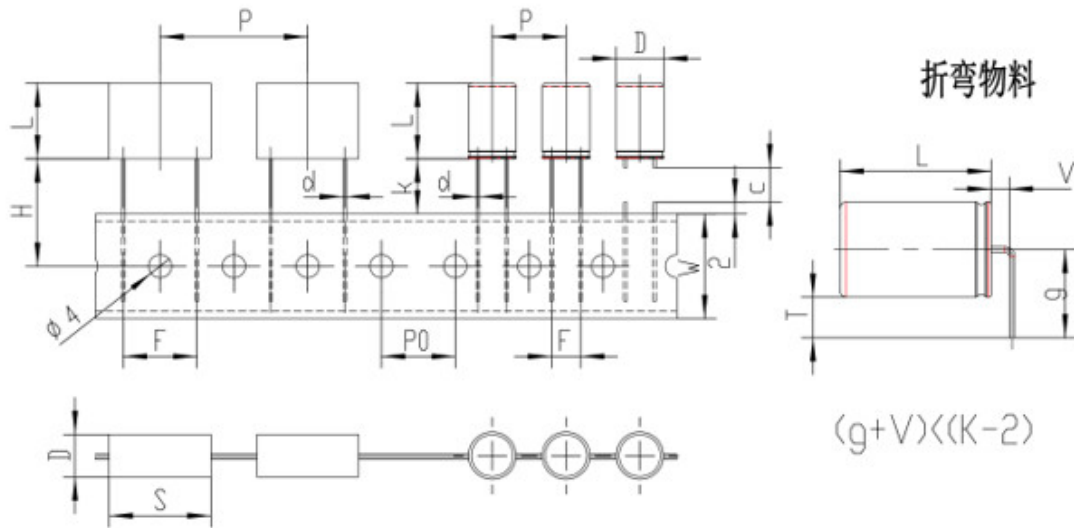

		Feeder type			Remarks
		GS-RAD2203	GS-RAD2201		
code	explain	Feeder reference material dimensions(mm)			
D	Material width	≤11	≤14		
S	Material length	≤14	≤14		
L	Material height	≤30	≤30		
F	Pin spacing	Narrow knife: ≤10	Narrow knife: ≤10	Narrow knife: ≤10	Default narrow knife
		Wide knife: 8-13	Wide knife: 8-13	Wide knife: 8-13	Optional
		Big knife: 8-16	Big knife: 8-23		Optional
d	Pin diameter	The largest0.6	The largest1.0		
P0	Hole spacing	12.7or15	Default12.7		
C	Adjustable range of the cutting knife	0-6(Based onW+2)			
V	The distance from the main body to the bending point	≥1.5			
K	The distance from braided to the bottom of the main body				
W	Braided tape height	18			
2	The minimum position dimension of the foot cutter	2	The minimum residual exposed size after the pins are cut		

For special material dimensions or custom requirements, please contact our technical team for consultation. We can provide tailored solutions and customize exclusive feeders to meet your specific production needs.