



## Pure Electric Vertical Feeder GS-RDD2105 750\*68\*144 110 mm External Dimensions

Our Product Introduction

for more products please visit us on [smtmachine-spareparts.com](http://smtmachine-spareparts.com)

### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RDD2105
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 900\*85\*145mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



### Product Specification

- Model: GS-RDD2105
- External Dimensions (length750\*68\*144(110)mm \* Width \* Height :
- Weight: 11KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80\*160 Pixels
- Error In The Length Of The Material Cutting Feet:  $\pm 0.2\text{mm}$
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm[Parts Need To Be Replaced]
- Function Of Cutting Waste Tape: Have



### More Images




## Product Description

### Vertical Feeder (GS-RDD2105)

The vertical feeder is an electronic component supply device that keeps a certain interval and sends out the electronic components of the vertical tape packaging one by one at a specified time, cuts the lead wires, and supplies them to the insertion machine.



Detail display

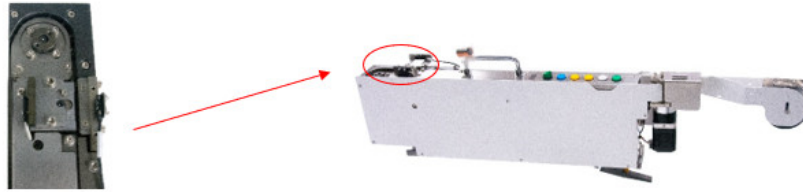

**Applicable material styles:**  
(The following are some of the display pictures)



LED

Resistance


Ferrari supercapacitor

Ceramic capacitor

**Finished product:**  
(The following part shows the pictures)



**Note :**  
GS-RDD2105 is the standard model (feeding and cutting) vertical feeder, while GS-RDD2105 (L) is the bending vertical feeder

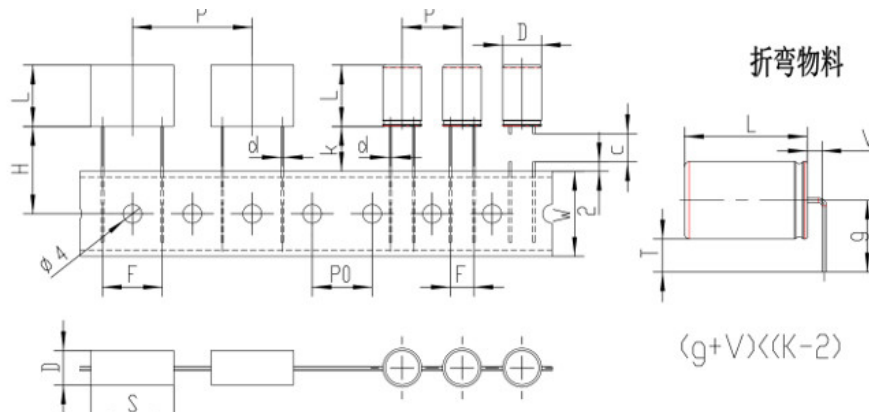

Feeder type		GS-RDD2105	Remarks
code	explain	Feeder reference material dimensions(mm)	
D	Material width	≤14	
S	Material length	≤14	
L	Material height	≤30	
F	Pin spacing	Standard knife: ≤10	Default standard knife
		Wide knife: 8-13	Optional
		Big knife: 8-23	Optional
d	Pin diameter	The largest1.0	
PO	Hole spacing	12.7or15	Default12.7
C	Adjustable range of the cutting knife	0-6(Based onW+2)	
V	The distance from the main body to the bending point	≥1.5	
K	The distance from braided to the bottom of the main body		
W	Braided tape height	18	
2	The minimum position dimension of the foot cutter	2	The minimum residual exposed size after the pins are cut

If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize exclusive feeders.



**Global Soul Limited**



+8613728696610



liyi@gs-smt.com



smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China