



GS-RAD2201 70mm Vertical Feeder with Optional Bending Function and Cutter

Our Product Introduction

for more products please visit us on smtmachine-spareparts.com

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RAD2201
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 900*95*175mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification

- Model: GS-RAD2201
- External Dimensions (length750*68*144(110)mm[The Height From The Bottom To The Feeding Port: 110cm Height At The Highest Point (from The Bottom To The Handle) : 144mm]
- Weight: 8KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80*160 Pixels
- Error In The Length Of The Material Cutting Feet: ± 0.2 mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm(Parts Need To Be Replaced)
- Function Of Cutting Waste: Optional GS-RAD2201: With A Cutter GS



Product Description

70mm Vertical Feeder (GS-RAD2201)[Applicable to large materials]

The vertical feeder is an electronic component supply device that keeps a certain interval and sends out the electronic components of the vertical tape packaging one by one at a specified time, cuts the lead wires, and supplies them to the insertion machine




Applicable material style:

(The following are some of the display pictures)



LED



Resistance



Ferrari supercapacitor




Ceramic capacitor

After plastic surgery:

(The following part shows the pictures)



Note: The 48mm vertical feeder is suitable for taping styles, and the 70mm vertical feeder is equally applicable. The difference compared with the former is that it has a wider compatibility range. It can produce materials with larger bodies and thicker pins.

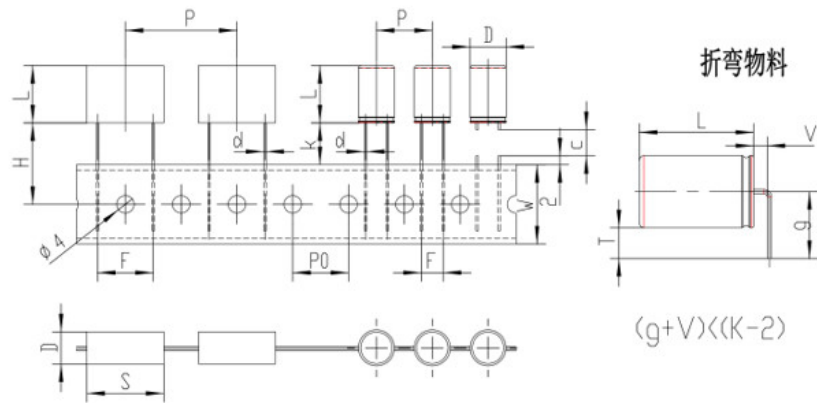

		Feeder type			
		GS-RAD2203	GS-RAD2201	Remarks	
code	explain	Feeder reference material dimensions(mm)			
D	Material width	≤11	≤14		
S	Material length	≤14	≤14		
L	Material height	≤30	≤30		
F	Pin spacing	Narrow knife: ≤10	Narrow knife: ≤10	Narrow knife: ≤10	Default narrow knife
		Wide knife: 8-13	Wide knife: 8-13	Wide knife: 8-13	Optional
		Big knife: 8-16	Big knife: 8-23		Optional
d	Pin diameter	The largest0.6	The largest1.0		
P0	Hole spacing	12.7or15	Default12.7		
C	Adjustable range of the cutting knife	0-6(Based onW+2)			
V	The distance from the main body to the bending point	≥1.5			
K	The distance from braided to the bottom of the main body				
W	Braided tape height	18			
2	The minimum position dimension of the foot cutter	2	The minimum residual exposed size after the pins are cut		

If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize exclusive feeders.