









# GS-RAZ2211 Tape Adjustment Feeder Gas Source Requirements 0.5MPa Electric Drive with Air Blowing

#### **Basic Information**


Place of Origin: ChinaBrand Name: GS

Model Number: GS-RAZ2211Minimum Order Quantity: 1 PCS

• Price: USD+negotiable+pcs

Packaging Details: 900\*650\*120
Delivery Time: 1-7 days
Payment Terms: T/T

Supply Ability: 1+pcs+per days



## **Product Specification**

Model: GS-RAZ2211
Weight: 17KG
Working Voltage: Ac 220V
Gas Source Requirements: 0.5MPa

Maximum Power: 400W(Direct Vibration: 330W)

• Feeding Speed: 1.5s/Pcs

Drive Mode: Electric[Blow Air To Assist In Throwing The

Waste Tape]

• Operation Panel: 0.96-inch TFT Color Screen 80\*160 Pixels

• Error In The Length Of The ±0.1mm

Material Cutting Feet:

• Applicable To The Hole 12.7mm/15mm[ Parts Need To Be Replaced]

Spacing Of The Tape:

Applicable Material Body ≤47mm

Height:

Applicable Material Pin ≤0.8mm


Diamatar


### **Product Description**

## Tape adjustment feeder(GS-RAZ2211)

The vertical feeder is an electronic component supply device that keeps a certain interval and sends out the electronic components of the vertical tape packaging one by one at a specified time, cuts the lead wires, and supplies them to the insertion machine.


#### **Function Introduction**

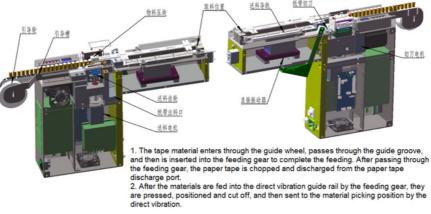









Tape adjustment feeder(GS-RAZ2211) Schematic diagram of appearance and dimensions (Unit:mm)

Finished product display of tape adjustment feeder (the following partial display pictures):



If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize exclusive feeders.

+8613728696610

liyi@gs-smt.com

smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China