



## GS-RDD2105 Vertical Feeder 0.6-2s/Pcs Speed 3A Current

Our Product Introduction

for more products please visit us on [smtmachine-spareparts.com](http://smtmachine-spareparts.com)

### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-RDD2105
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 900\*85\*145mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



### Product Specification

- Model: GS-RDD2105
- External Dimensions (length750\*68\*144(110)mm  
\* Width \* Height :
- Weight: 11KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 0.6-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen 80\*160 Pixels
- Error In The Length Of The Material Cutting Feet:  $\pm 0.2$ mm
- Applicable To The Hole Spacing Of The Tape: 12.7mm/15mm[Parts Need To Be Replaced]
- Function Of Cutting Waste Tape: Have



### More Images



## Product Description

### GS-RDD2105 Vertical Feeder with 0.6-2s/Pcs Feeding Speed and Maximum 3A Current

#### Product Specifications

Attribute	Value
Model	GS-RDD2105
External dimensions (L×W×H)	750×68×144(110)mm
Weight	11KG
Working voltage	DC 24V
Gas source requirements	No
Maximum current	3A
Feeding speed	0.6-2s/Pcs
Drive mode	Pure electric
Operation panel	0.96-inch TFT color screen (80×160 pixels)
Error in material cutting length	±0.2mm
Applicable tape hole spacing	12.7mm/15mm (Parts need to be replaced)
Cutting waste tape function	Yes
Bending function	Optional (Customizable according to material)
Cutter lifespan	≥1 million uses


#### Product Description

The GS-RDD2105 Vertical Feeder is an advanced electronic component supply device designed for precision manufacturing applications. It maintains consistent intervals while delivering vertically packaged electronic components at specified times, cutting lead wires, and supplying them to insertion machines with exceptional accuracy.





#### Detailed Features

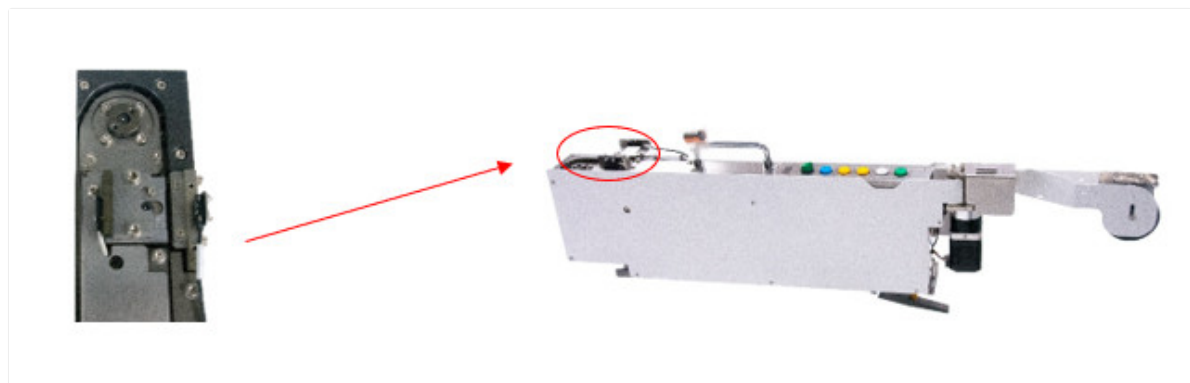


### Applicable material styles:

(The following are some of the display pictures)



LED



Resistance



Ferrari supercapacitor



Ceramic capacitor


### Finished product:

(The following part shows the pictures)



Note :

GS-RDD2105 is the standard model (feeding and cutting) vertical feeder, while GS-RDD2105 (L) is the bending vertical feeder

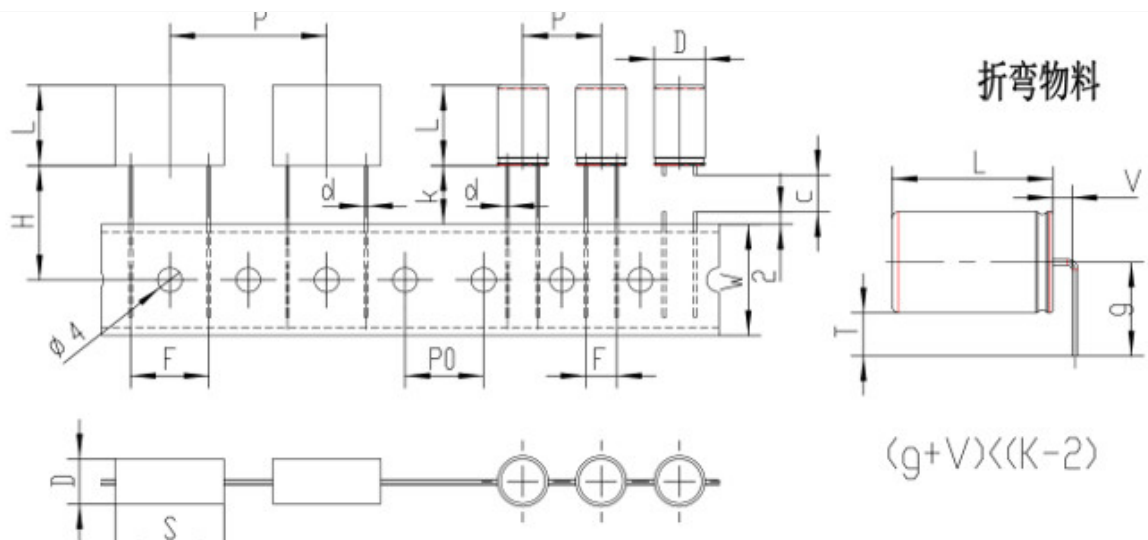

Feeder type		GS-RDD2105	Remarks
code	explain	Feeder reference material dimensions(mm)	
D	Material width	≤14	
S	Material length	≤14	
L	Material height	≤30	
F	Pin spacing	Standard knife: ≤10	Default standard knife
		Wide knife: 8-13	Optional
		Big knife: 8-23	Optional
d	Pin diameter	The largest1.0	
PO	Hole spacing	12.7or15	Default12.7
C	Adjustable range of the cutting knife	0-6(Based onW+2)	
V	The distance from the main body to the bending point	≥1.5	
K	The distance from braided to the bottom of the main body		
W	Braided tape height	18	
2	The minimum position dimension of the foot cutter	2	The minimum residual exposed size after the pins are cut

*For special material dimensions or custom requirements, please contact our technical team for consultation. We can provide tailored solutions and customize exclusive feeders to meet your specific production needs.*



**Global Soul Limited**



+8613728696610



liyi@gs-smt.com



smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China