



GS-AAD2101 Standard Horizontal Feeder for 66-87mm Tape

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-AAD2101/ GS-AAD2102
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 800*245*240mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification

- Model: GS-AAD2101
- Overall Dimensions (length * Width * Height Unit Mm): 570*115*140mm
- Weight: 11KG
- Working Voltage: DC 24V
- Gas Source Requirements: No
- Maximum Current: 3A
- Feeding Speed: 1.5-2s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen, 80*160 Pixels
- Material Lifting Error: $\pm 0.4\text{mm}$
- Applicable Tape Width: 66-87mm
- The Pin Size Error After The Mold Is Formed: $\pm 0.2\text{mm}$
- Highlight: **GS-AAD2101 Horizontal Feeder,
66-87mm Tape Horizontal Feeder,**

for more products please visit us on smtmachine-spareparts.com

Product Description

GS-AAD2101/GS-AAD2102 Standard Horizontal Feeder for 66-87mm Tape Width

Product Specifications

Attribute	Value
Model	GS-AAD2101
Overall dimensions (L×W×H)	570×115×140mm
Weight	11KG
Working voltage	DC 24V
Gas source requirements	None
Maximum current	3A
Feeding speed	1.5-2s/Pcs
Drive mode	Pure electric
Operation panel	0.96-inch TFT color screen, 80×160 pixels
Material lifting error	±0.4mm
Applicable tape width	66-87mm
Pin size error after mold formation	±0.2mm


Product Description

The GS-AAD2101/GS-AAD2102 Standard Horizontal Feeder is an electronic component supply device that maintains consistent intervals and feeds horizontal tape-packed components at precise intervals. It shapes and cuts lead wires before supplying components to the insertion machine.



Applicable to the style of braiding:

(The following are some display pictures)

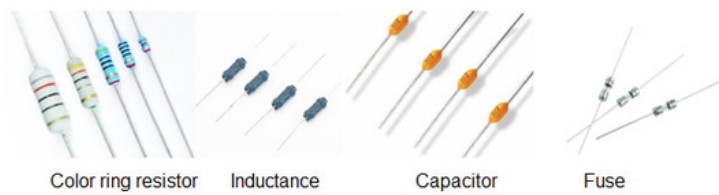

Finished product:


(The following are some display pictures)



GS-AAD2102 Model (110mm Wide)

Model	GS-AAD2102
Overall dimensions (length * width * height unit: mm)	570*115*140mm
Weight	11KG
Working voltage	DC 24V
Gas source requirements	no
Maximum current	3A
Feeding speed	1.5-2s/Pcs
Drive mode	Pure electric
Operation panel	0.96-inch TFT color screen, 80*160 pixels
Material lifting error	±0.4mm
Applicable tape width	66-87mm
The pin size error after the mold is formed	±0.2mm

This horizontal standard model is specifically designed for braided tape materials with the following specifications:

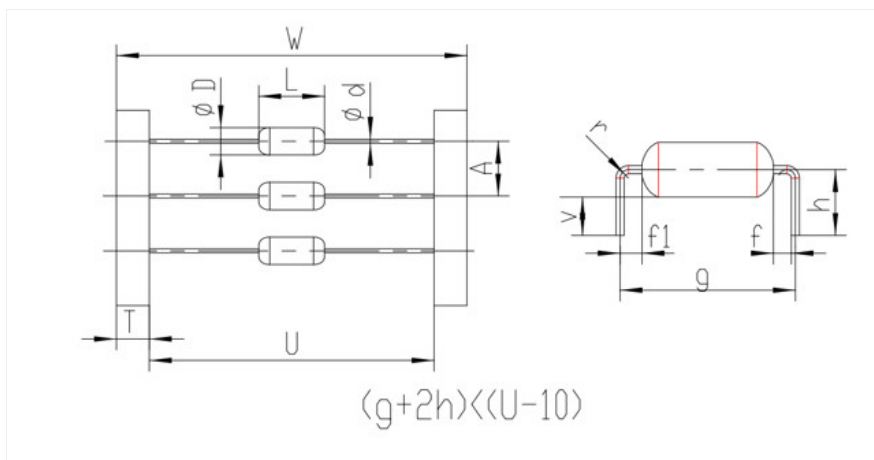

Code name	Explanation	Reference size (mm)	Remarks
W	Braided tape width	38-90	AAD-2101:38-70 AAD-2102:71-90
A	Tape spacing	5or10	
T	Paper tape width	6	
L	Ontology length	1-20	
D	Ontology width	0.4-10	
d	Pin diameter	0.4-0.8	The range of 0.8-1.3 requires special customization.
f	The distance from the main body to the bending point	≥1.5	
g	Pin span	5-40	Customization is available beyond the scope
V	PCB board thickness + exposed	Provided by the customer	
h	Ontology radius + V	Provided by the customer	

Custom solutions available: For special material dimensions, please contact our company to discuss customized feeder options.



Global Soul Limited

+8613728696610

liyi@gs-smt.com

smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China