

Custom Horizontal Feeder GS-AAD2208 with 0.96-inch TFT Screen

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-AAD2208
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 700*300*300MM
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



Product Specification

- Model: GS-AAD2208
- Overall Dimensions (length * Width * Height Unit Mm): 570*127*150mm
- Weight: 14KG
- Working Voltage: DC 24V
- Maximum Current: 3A
- Feeding Speed: 2.5-3s/Pcs
- Drive Mode: Pure Electric
- Operation Panel: 0.96-inch TFT Color Screen, 80*160 Pixels
- Material Lifting Error: ± 0.4 mm
- Applicable Tape Width: 63-90 Mm
- Highlight: **GS-AAD2208 Horizontal Feeder, Customized Horizontal Feeder, GS-AAD2208**

Product Description

Customized Horizontal Feeder Model K GS-AAD2208 featuring 0.96-inch TFT Color Screen Operation Panel

Product Specifications

Attribute	Value
Model	GS-AAD2208
Overall dimensions (length × width × height)	570 × 127 × 150 mm
Weight	14KG
Working voltage	DC 24V
Maximum current	3A
Feeding speed	2.5-3s/Pcs
Drive mode	Pure electric
Operation panel	0.96-inch TFT color screen, 80×160 pixels
Material lifting error	±0.4mm
Applicable tape width	63-90 mm

Product Description



The K Horizontal Feeder (GS-AAD2208) is an electronic component supply device designed to maintain precise intervals while feeding horizontal tape-packed components. This customized version features:

- Automated feeding of components at prescribed intervals
- Precision shaping and lead wire cutting
- Seamless integration with insertion machines
- High-precision operation with ±0.4mm material lifting error



Applicable Specifications

Designed for woven tape materials with the following specifications:

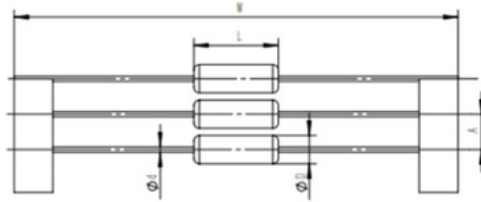

Code name	Explanation	Reference size (mm)
A	Tape spacing	5/10
W	Braided tape width	62-90
L	Ontology length	5-22
D	Ontological diameter	3-8
d	Pin diameter	0.4-0.8
g	Pin span	12-26
h	Bending height	7-12
e	Position of Point k	3.5-6.5
f	The distance from the main body to the bending point	>1.5

For special material dimensions or custom requirements, please contact our technical team for consultation. We provide tailored solutions and exclusive feeder customization services.



Global Soul Limited



+8613728696610



liyi@gs-smt.com



smtmachine-spareparts.com

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China