




Customized Horizontal Feeder K Model GS-AAD2412 with 0.5-0.7Mpa Gas Source and Pneumatic Drive

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GS-AAD2412
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 800*300*200mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days

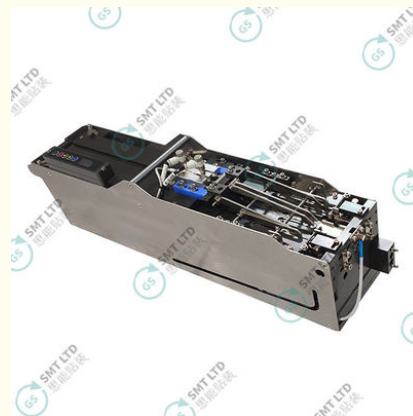

Product Specification




- Model: GS-AAD2412
- Overall Dimensions (length * Width * Height Unit Mm): 536*109*140.5mm
- Weight: 9KG
- Working Voltage: DC 24V
- Gas Source Requirements: 0.5-0.7Mpa
- Maximum Current: 1.3A
- Feeding Speed: 2s/Pcs
- Drive Mode: Pneumatic
- Operation Panel: 0.96-inch TFT Color Screen, 80*160 Pixels
- Material Lifting Error: ± 0.4 mm
- Applicable Tape Width: 63-90 Mm
- Condition: New
- Highlight: **0.5-0.7Mpa Pneumatic Feeder, Pneumatic Drive Pneumatic Feeder, GS-AAD2412 Horizontal Feeder**

for more products please visit us on smtmachine-spareparts.com


K Horizontal Feeder (GS-AAD2412)

[Customized Version]

The horizontal feeder is an electronic component supply device that keeps a certain interval and feeds out the horizontal tape-packed electronic components one by one at the prescribed time, shapes them and cuts the lead wires, and supplies them to the insertion machine.

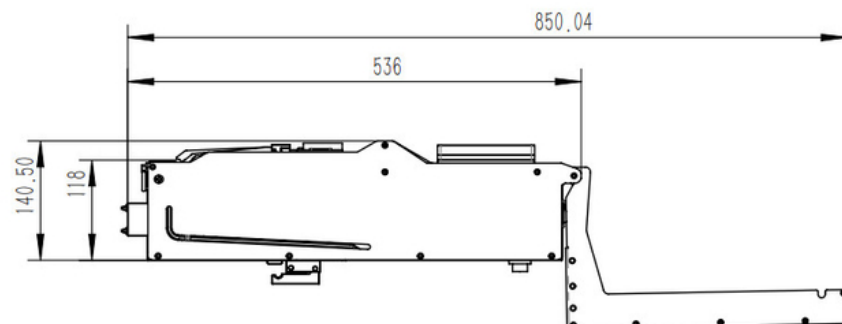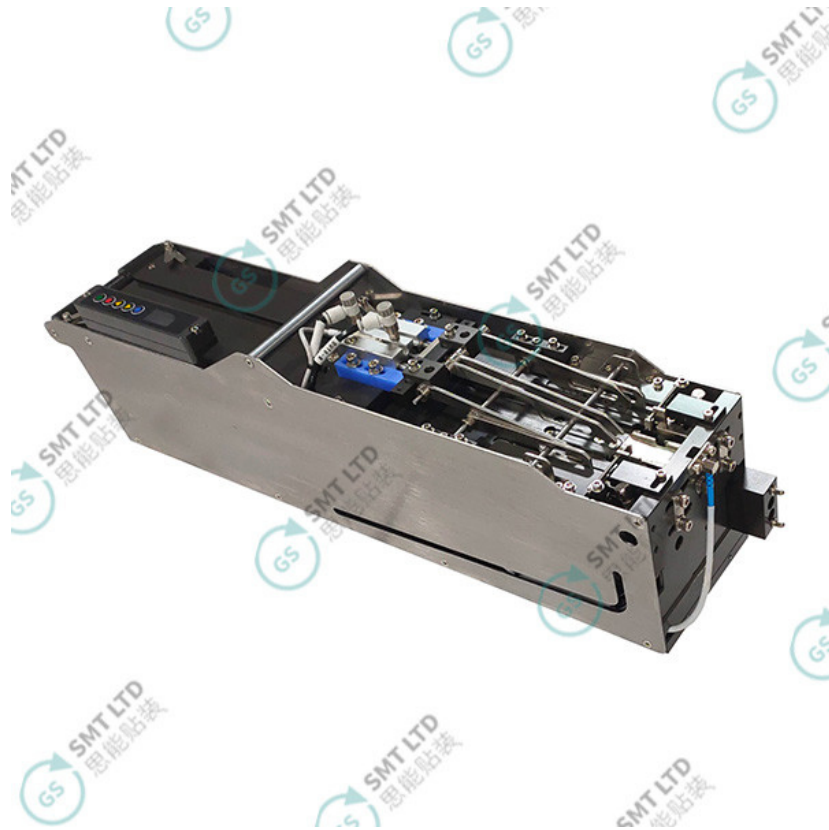

Applicable to the specifications of braided tape materials

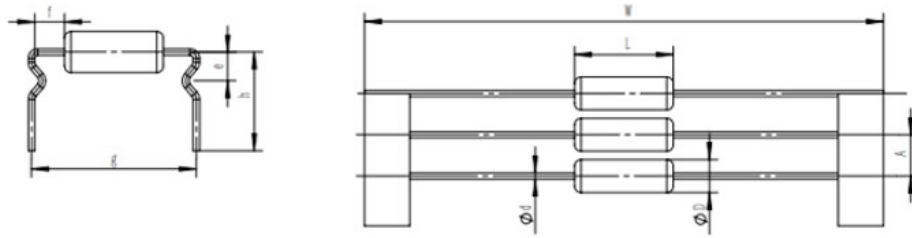

Code name	Explanation	Reference size (mm)
A	Tape spacing	5/10
W	Braided tape width	62-90
L	Ontology length	5-22
D	Ontological diameter	3-8
d	Pin diameter	0.4-0.8
g	Pin span	12-26
h	Bending height	7-12
e	Position of Point k	3.5-6.5
f	The distance from the main body to the bending point	>1.5

If there are special material dimensions, you can contact our company for consultation and to provide solutions and customize exclusive feeders.