



## PET Sharp Angle SMT Double Splice Tape Universal GSM01 Series

Our Product Introduction

for more products please visit us on [smtmachine-spareparts.com](http://smtmachine-spareparts.com)


### Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: GSM0108/GSM0112/GSM0116/GSM0124
- Minimum Order Quantity: 1 PCS
- Price: USD+negotiable+pcs
- Packaging Details: 18\*42\*10mm
- Delivery Time: 1-7 days
- Payment Terms: T/T
- Supply Ability: 1+pcs+per days



### Product Specification

- Brand Name: GS
- Material: PET
- Model Number: GSM0108/GSM0112/GSM0116/GSM0124
- Product Name: Double Splice Tapes
- Application: SMT Process
- Customization: Support
- Highlight: **PET SMT Double Splice Tape, Sharp SMT Double Splice Tape**

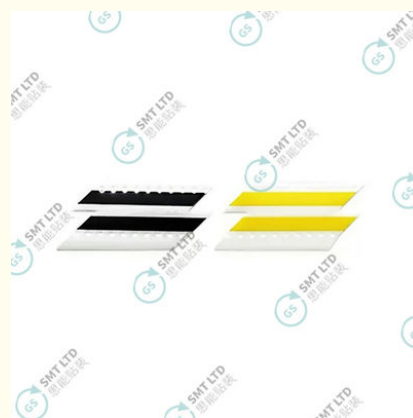

### More Images




## Product Description

### GSM01 Series SMT PET Sharp Angle Double Splice Tape Universal

GSM01 series Double Splice Tapes are used to join SMT component carrier tapes. Supplied in pre-cut strips of PET tape, use without the splice tool and clip. Each piece has 10 embossed dots on either side to help align with the carrier tape. Three kinds of anti-static, half anti-static and non anti-static

#### Instructions for Using GSM01 Series Double Splice Tapes

1. Use the Cutting Tool to Accurately Cut the Carrier Tapes: Begin by using a cutting tool (such as GSMTL20, GSMTL30, or GSMTL40) to accurately cut the carrier tapes. Ensure that the cuts are clean and precise, as this will impact the quality of the splice.
2. Remove the Release Liner of the Splice Tape: Next, remove the release liner from the splice tape to reveal the adhesive side. This adhesive side will be used to join the cut carrier tapes.
3. Align the Cut Carrier Tapes with the Placement Guide: Align the cut carrier tapes (with the cover tape facing down) with the placement guide on the splice tape.
4. Place Both Joining Carrier Tapes onto the First Strip of the Splice Tape: Carefully place both joining carrier tapes onto the first strip of the splice tape. Ensure that the tapes are aligned correctly and that the adhesive side of the splice tape makes contact with the carrier tapes.
5. Fold Over the Second Strip to the Underside of the Carrier Tape: Fold over the second strip of the splice tape to the underside of the carrier tape. Press firmly to ensure that the adhesive makes a strong bond with the carrier tapes.
6. Remove and Discard the Clear Plastic Cover and Guide: Finally, remove and discard the clear plastic cover from the splice tape to complete the splice. The splice is now ready for use in the SMT production process.

Part (reel)	Dimensions (pc)	Package(box)	
GSM0108 (8mm)	4.8mm x 40mm	500pcs	
GSM0112 (12mm)	6mm x 40mm	500pcs	
GSM0116 (16mm)	9.5mm x 40mm	500pcs	
GSM0124 (24mm)	16mm x 40mm	250pcs	

SMT PET Sharp Angle Double Splice Tape Universal GSM01 Series | GSSMT, SMT double splice tape, SMT double splice tape for pick-and-place, SMT double splice tape yellow, SMT double splice tape suppliers, Double splice tape for SMT machines, SMT double splice tape adhesive, SMT double splice tape black, SMT double splice tape usage guide, SMT double splice tape for feeders, High-quality SMT double splice tape, SMT double splice tape price, SMT splice tape double-sided, Double splice tape for Panasonic SMT, Double splice tape for Fuji SMT, SMT double splice tape compatibility, Double splice tape for high-speed SMT machines, SMT double splice tape performance, SMT double splice tape durability, SMT splice tape double strength, SMT double splice tape best practices



Global Soul Limited



+8613728696610



liyi@gs-smt.com



[smtmachine-spareparts.com](http://smtmachine-spareparts.com)

Room F3B-016, B Block, Hao Yun Lai Bussiness Building, Liutang road , Bao'an District , Shenzhen, China